


# Tubo tondo elettrounito

Norme: EN10217-7

Materiale: Aisi 304L EN 1.4307 - Aisi 316L EN 1.4304

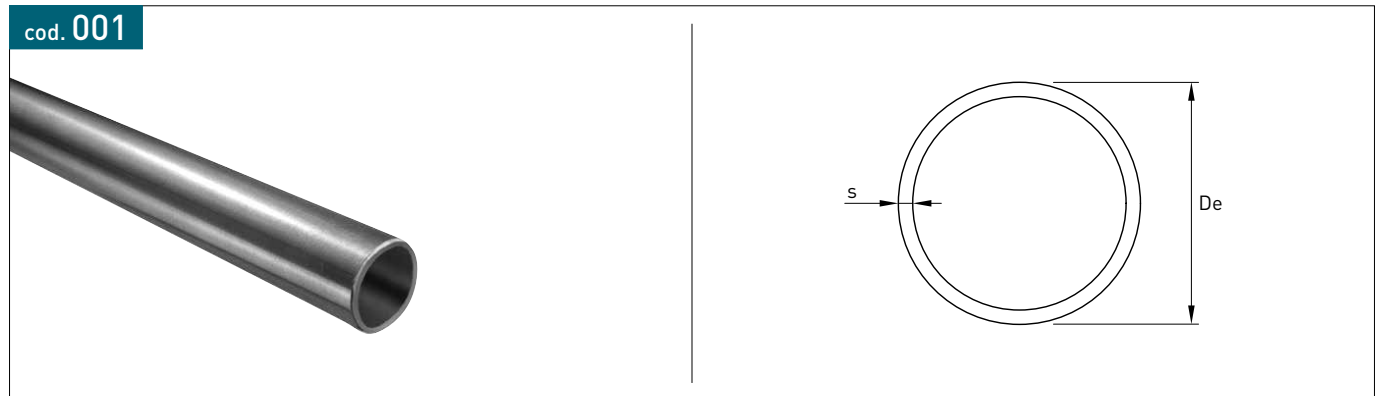

DN	DN inch	De mm	Stock		Peso kg/m	
			spessore (S)		spessore (S)	
			2,00 mm	3,00 mm	2,00 mm	3,00 mm
10	3/8"	17,2	R	N	0,76	-
15	1/2"	21,3	D	D	0,97	1,37
20	3/4"	26,9	D	D	1,25	1,80
25	1"	33,7	D	D	1,59	2,31
32	1 1/4"	42,4	D	D	2,02	2,96
40	1 1/2"	48,3	D	D	2,32	3,40
50	2"	60,3	D	D	2,92	4,30
65	2 1/2"	76,1	D	D	3,71	5,49
80	3"	88,9	D	D	4,35	6,45
100	4"	114,3	D	D	5,62	8,36
125	5"	139,7	D	D	6,90	10,27
150	6"	168,3	D	D	8,33	12,42
200	8"	219,1	D	D	10,87	16,23
250	10"	273	D	D	13,57	21,62
300	12"	323,9	R	D	16,12	24,11
350	14"	355,6	N	R	-	26,49
400	16"	406,4	N	R	-	30,28
450	18"	457,2	N	R	-	34,10
500	20"	508	N	R	-	37,94
600	24"	609,6	N	R	-	45,57