


Tee ridotto ISO

Norme: EN10253

Materiale: Aisi 304L EN 1.4307 – Aisi 316L EN 1.4404

cod. 321

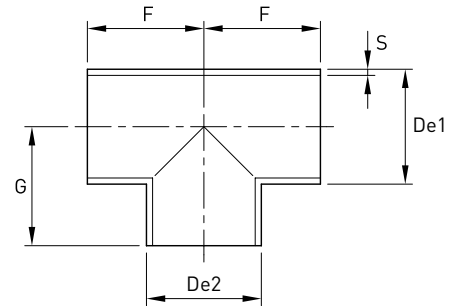

DN1	DN1 inch	De1 mm	DN2	DN2 inch	De2 mm	F mm	G mm	Stock		Peso kg	
								spessore (S)		spessore (S)	
								2,00 mm	3,00 mm	2,00 mm	3,00 mm
20	3/4"	26,9	15	1/2"	21,3	29	29	D	R	0,079	-
25	1"	33,7	20	3/4"	26,9	38	38	D	R	0,137	0,215
			15	1/2"	21,3			R	R	0,137	0,215
32	1 1/4"	42,4	25	1"	33,7	48	48	D	R	0,233	0,344
			20	3/4"	26,9			R	R	0,233	0,344
			15	1/2"	21,3			D	R	0,233	0,344
40	1 1/2"	48,3	32	1 1/4"	42,4	57	57	D	R	0,307	0,463
			25	1"	33,7			D	R	0,307	0,463
			20	3/4"	26,9			D	R	0,307	0,463
			40	1 1/2"	48,3			D	R	0,408	0,612
50	2"	60,3	40	1 1/2"	48,3	64	60	D	R	0,408	0,612
			32	1 1/4"	42,4			D	R	0,408	0,612
			25	1"	33,7			R	R	0,408	0,612
65	2 1/2"	76,1	50	2"	60,3	76	70	D	R	0,603	0,941
			40	1 1/2"	48,3			D	R	0,603	0,941
			32	1 1/4"	42,4			R	R	0,603	0,941
			65	2 1/2"	76,1			R	R	0,860	1,263
80	3"	88,9	50	2"	60,3	86	83	D	R	0,860	1,263
			40	1 1/2"	48,3			R	R	0,860	1,263
			80	3"	88,9			D	R	1,268	1,981
100	4"	114,3	65	2 1/2"	76,1	105	98	R	R	1,268	1,981
			50	2"	60,3			D	R	1,268	1,981
			100	4"	114,3			D	R	1,268	1,981
125	5"	139,7	100	4"	114,3	124	117	D	D	1,856	2,783
			80	3"	88,9			R	R	1,856	2,783
			65	2 1/2"	76,1			R	R	1,856	2,783
150	6"	168,3	125	5"	139,7	143	137	R	R	2,984	3,808
			100	4"	114,3			D	D	2,984	3,808
			80	3"	88,9			R	R	2,984	3,808
200	8"	219,1	150	6"	168,3	178	168	R	R	4,337	6,505
			125	5"	139,7			R	R	4,337	6,505
			100	4"	114,3			R	R	4,337	6,505
250	10"	273	200	8"	219,1	216	203	R	R	5,230	7,850
			150	6"	168,3			R	R	5,230	7,850
			125	5"	139,7			R	R	5,230	7,850
300	12"	323,9	250	10"	273	254	241	R	R	10,000	18,53
			200	8"	219,1			R	R	10,000	18,53
			150	6"	168,3			R	R	10,000	18,53
350	14"	355,6	300	12"	323,9	279	270	R	R	-	22,16
			250	10"	273			R	R	-	22,16
			200	8"	219,1			R	R	-	22,16
400	16"	406,4	350	14"	355,6	305	305	R	R	-	27,92
			300	12"	323,9			R	R	-	27,92
			250	10"	273			R	R	-	27,92
450	18"	457,2	400	16"	406,4	343	330	R	R	-	35,35
			350	14"	355,6			R	R	-	35,35
			300	12"	323,9			R	R	-	35,35
500	20"	508	450	18"	457,2	381	368	R	R	-	43,64
			400	16"	406,4			R	R	-	43,64
			350	14"	355,6			R	R	-	43,64

D = Disponibile a magazzino R = Disponibile a richiesta N = Non fornibile