


# Tee sbocato ISO/METRICO

Norme: EN10253

Materiale: Aisi 304L EN 1.4307 - Aisi 316L EN 1.4404

cod. 320S

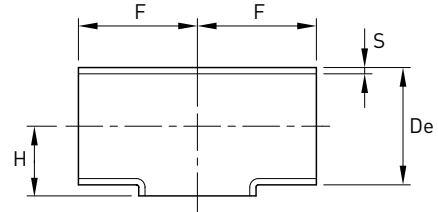

DN	DN inch	De mm	F mm	H mm	Stock		Peso kg	
					spessore (S)		spessore (S)	
					2,00 mm	3,00 mm	2,00 mm	3,00 mm
10	3/8"	17,2	25,5	10	R	N	0,027	-
15	1/2"	21,3	25,5	12	R	N	0,044	-
20	3/4"	26,9	28,5	15	R	N	0,063	-
25	1"	33,7	38	19	R	R	0,107	0,155
32	1 1/4"	42,4	47,5	24	R	R	0,179	0,260
40	1 1/2"	48,3	57	26	R	R	0,242	0,352
50	2"	60,3	63,5	34	R	R	0,345	0,509
65	2 1/2"	76,1	76	42	R	R	0,532	0,751
80	3"	88,9	85,5	48,5	R	R	0,679	0,970
100	4"	114,3	105	63	R	R	1,095	1,642
125	5"	139,7	124	76	R	R	1,514	2,254
150	6"	168,3	142	92	R	R	2,129	3,133
200	8"	219,1	179	122	R	R	3,371	4,908
250	10"	273	216,5	151	N	R	-	7,514
300	12"	323,9	254	177	N	R	-	13,400