


Tee filettato ridotto microfuso - Fig. 132

Norme: ISO 228/1 GAS Cilindrico
 Materiale: Aisi 316 EN 1.4401

cod. 413R

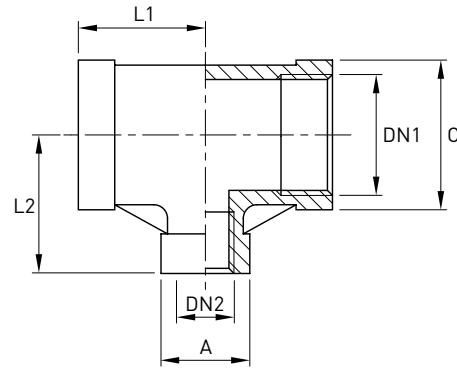

| DN1 | DN1 inch | DN2 | DN2 inch | L1 mm | L2 mm | A mm | C mm | Stock |
|-----|----------|-----|----------|-------|-------|------|------|-------|
| 8 | 1/4" | 5 | 1/8" | 18 | 19 | 17 | 21 | R |
| 10 | 3/8" | 8 | 1/4" | 20 | 22 | 21 | 23 | R |
| 15 | 1/2" | 10 | 3/8" | 26 | 25 | 23,5 | 29 | R |
| 20 | 3/4" | 15 | 1/2" | 30 | 32 | 30 | 37 | R |
| 25 | 1" | 15 | 1/2" | 32 | 33,4 | 30,5 | 44 | R |
| | | 20 | 3/4" | 35 | 35 | 35,8 | 44 | R |
| 32 | 1 1/4" | 15 | 1/2" | 34 | 38 | 28,8 | 51,4 | R |
| | | 20 | 3/4" | 38 | 40 | 35,8 | 51,4 | R |
| | | 25 | 1" | 40 | 42 | 43,3 | 51,4 | R |
| 40 | 1 1/2" | 15 | 1/2" | 35 | 42 | 28,8 | 57,9 | R |
| | | 20 | 3/4" | 38 | 43 | 35,8 | 57,9 | R |
| | | 25 | 1" | 41 | 45 | 43,3 | 57,9 | R |
| | | 32 | 1 1/4" | 45 | 48 | 51,4 | 57,9 | R |
| 50 | 2" | 15 | 1/2" | 38 | 48 | 28,8 | 71 | R |
| | | 20 | 3/4" | 41 | 49 | 35,8 | 71 | R |
| | | 25 | 1" | 44 | 51 | 43,3 | 71 | R |
| | | 32 | 1 1/4" | 48 | 54 | 51,4 | 71 | R |
| | | 40 | 1 1/2" | 52 | 55 | 57,9 | 71 | R |