


Flangia collare PN16 SCH 40S

Norme: EN1092-1 TYPE 11B - ASTM A182

Materiale: Aisi 304L EN 1.4307 - Aisi 316L EN 1.4404

cod. **344C40**

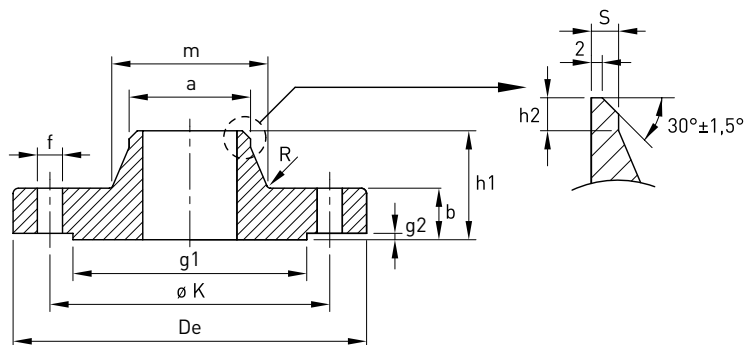

DN	DN inch	Flangia mm					Collarino mm				Gradino mm		Foratura			Stock	Peso kg
		a	ø K	De	b	h1	m	S	R	h2	g1	g2	f mm	Vite	Fori		
15	1/2"	21,34	65	95	16	38	32	2,77	4	6	45	2	14	M12	4	R	0,77
20	3/4"	26,67	75	105	18	40	40	2,87	4	6	58	2	14	M12	4	R	1,09
25	1"	33,4	85	115	18	40	46	3,38	4	6	68	2	14	M12	4	R	1,30
32	1 1/4"	42,16	100	140	18	42	56	3,56	6	6	78	2	18	M16	4	R	1,91
40	1 1/2"	48,26	110	150	18	45	64	3,68	6	7	88	3	18	M16	4	R	2,15
50	2"	60,33	125	165	18	45	74	3,91	6	8	102	3	18	M16	4	R	2,53
65	2 1/2"	73,03	145	185	18	54	92	5,16	6	10	122	3	18	M16	4	R	3,03
80	3"	88,9	160	200	20	50	105	5,49	6	10	138	3	18	M16	8	R	3,92
100	4"	114,3	180	220	20	52	131	6,02	8	12	158	3	18	M16	8	R	4,62
125	5"	141,3	210	250	22	55	156	6,55	8	12	188	3	18	M16	8	R	6,30
150	6"	168,28	240	285	22	55	184	7,11	10	12	212	3	22	M20	8	R	7,81
200	8"	219,08	295	340	24	62	235	8,18	10	16	268	3	22	M20	12	R	11,5